


SURFACE MOUNT

CEILING OR WALL
ONE OR TWO LAMP
T5 ELECTRONIC

SERIES 255

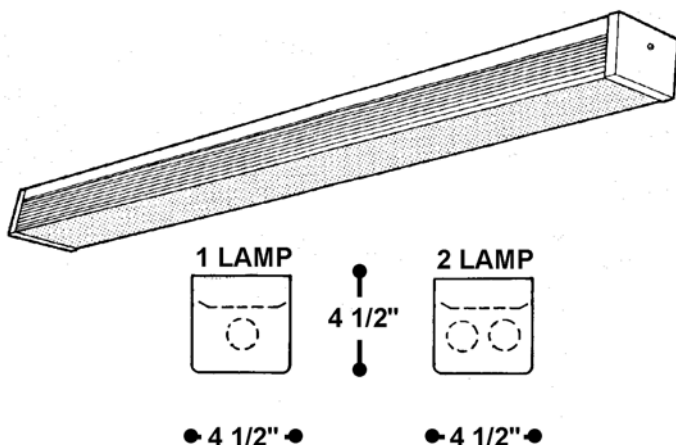

PROJECT:

FIXTURE TYPE:

CATALOG NO.:

VOLTS:

BALLAST TYPE:

DATE:

APPLICATIONS: Versatile and elegant fixture for general area lighting. One or two lamp, ceiling or wall mount. Ideal for use in corridors, powder rooms, hospitals, residences, and dormitories. Suitable for continuous row mounting. Complies with city of New York requirements.

SPECIFICATIONS

CONSTRUCTION: The housing and ends are die formed of heavy code gauge steel, rigidly fabricated to insure true and perfect alignment. Spot welded for structural rigidity.

DIFFUSER: Clear acrylic with hexagonal prisms on the lower surface and linear prisms on both vertical surfaces. Lens is removable for relamping & maintenance by removal of the end caps.

BALLAST: Standard 28 watt fully electronic T5, parallel instant start, high power factor, Class "P", minimum .85 Ballast Factor, THD < 20%, for 120V 60 Hz operation. Ballasts of other voltages are optionally available.

MOUNTING: Ceiling or wall mounted, individually or in continuous rows. For continuous mounting, a continuous run joiner band is available.

FINISH: All steel components parts are corrosion protected and coated with baked white synthetic polyester for maximum durability.

CERTIFICATION: U.L. listed and I.B.E.W. Union made.

ORDERING INFORMATION

CATALOG #	LAMPS	BALLAST	NOMINAL LENGTH
255128	1-F28W-T5	T5 ELECTRONIC	46 1/4"
255228	2-F28W-T5	T5 ELECTRONIC	46 1/4"

OPTIONAL: Emergency battery backup (add suffix "EML")
Smooth white acrylic diffuser (add suffix "WA")

CROWNLITE MFG. CORP. 1546 Ocean Ave., Bohemia, L.I., N.Y. 631.589.9100, Fx 631.589.4584
Information supplied may change without notice. Consult factory for verification, samples, and minimum quantities. Copyright 2003