



SURFACE ANGLE FLUORESCENT

ONE OR TWO LAMP T8 ELECTRONIC
MEETS NYC REQUIREMENTS

SERIES 317

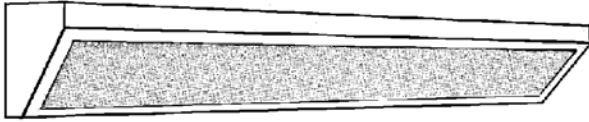

PROJECT:

FIXTURE TYPE:

CATALOG NO.:

VOLTS:

BALLAST TYPE:

DATE:

APPLICATIONS: A versatile surface mounted fixture designed for angle lighting at ceiling and wall intersection or the intersection of two walls. Ideal lighting for narrow corridors, service stations and loading platforms. T8 lamps along with electronic ballasts offer high lumin output and energy savings. Welded construction and quality components assure long trouble free life.

SPECIFICATIONS

CONSTRUCTION: The housing and ends are die formed of 20 GA cold rolled steel (CRS), rigidly fabricated and electrically welded to insure true and perfect alignment. The door frame is hinged from one side along with provisions for thumb or tamperproof screws on the other.

DIFFUSER: Pattern 12 clear acrylic prismatic is standard. Other diffusers or cube louvers are available. (CONSULT FACTORY)

BALLAST: 17w, 25w, 32w, or 40 watt fully electronic T8, parallel instant start, high power factor, Class "A" sound rated, UL listed for 120 V 60 Hz operation are standard. Ballasts <10% THD along with other voltages and frequencies are also available. (CONSULT FACTORY).

MOUNTING: Installed flush with ceiling surface, on wall, at wall-ceiling corner, or wall-wall corner, individually or in continuous rows. Adequate knockouts are supplied for feed thru and entry.

FINISH: All steel components parts are corrosion protected and coated with baked white polyester powder for maximum durability.

CERTIFICATION: U.L. listed and I.B.E.W.Union made.

ORDERING INFORMATION

CATALOG #	LAMP	BALLAST	LENGTH
317117T8	1-F17W-T8	ELECTRONIC	24"
317125T8	1-F25W-T8	ELECTRONIC	36"
317132T8	1-F32W-T8	ELECTRONIC	48"
317217T8	2-F17W-T8	ELECTRONIC	24"
317225T8	2-F25W-T8	ELECTRONIC	36"
317232T8	2-F32W-T8	ELECTRONIC	48"

OPTIONAL: Emergency battery backup (add suffix "EML")
Electronic dimming ballast (add suffix "DIM")
Tamperproof screws (add suffix "TP")
Flat white acrylic diffuser (add suffix "FWA")
Double gasket for damp location
(gasket diffuser to door frame, door frame to housing add suffix "DL")

CROWNLITE MFG. CORP. 1546 Ocean Ave., Bohemia, L.I., N.Y. 631.589.9100, Fx 631.589.4584
Information supplied may change without notice. Consult factory for verification, samples, and minimum quantities. Copyright 2001