

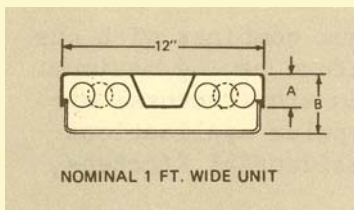


Optional Wood Frame (565)
Available - See Reverse Side.

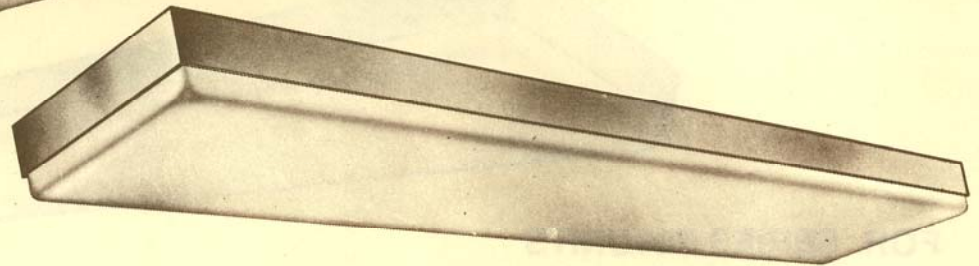

	Depth	
	A	B
Trigger and Rapid Start Units	2"	3-1/2"
Slimline Units	3-1/2"	5"

		Acrylic 24" x 48"								
		20%		20%		20%				
		80%		70%		50%				
		Pw		50		30				
		10		50		30				
		10		50		30				
ROOM CAVITY RATIO	1	.66	.64	.62	.65	.63	.61	.56	.55	.54
	2	.58	.54	.50	.57	.53	.50	.49	.47	.45
	3	.51	.46	.42	.50	.45	.41	.44	.41	.38
	4	.45	.39	.35	.44	.39	.35	.39	.35	.33
	5	.39	.34	.29	.38	.34	.29	.34	.31	.28
	6	.35	.29	.25	.35	.29	.25	.31	.27	.24
	7	.31	.26	.22	.31	.25	.22	.28	.24	.21
	8	.28	.22	.19	.28	.22	.19	.25	.21	.18
	9	.25	.20	.16	.24	.20	.16	.22	.18	.15
	10	.23	.17	.14	.23	.16	.14	.20	.16	.13

Multiplier 2 Lamp Fixture-1.03

SPECIFICATIONS

CONSTRUCTION: Housing is constructed of heavy gauge cold rolled steel, die-formed for uniformity and accuracy. Unit is completely spot-welded and rigidly constructed.

DIFFUSER: Smooth milk-white or Prismatic Acrylic diffuser provides excellent light diffusion and lamp hiding characteristics. Diffuser is firmly retained by the housing and snaps in and out for easy maintenance.

FINISH: All metal components are finished in baked white enamel over phosphate undercoating having a minimum reflectance factor of 88%.

WIRING: Completely wired with HPF fully electronic ballast, ready for 120 Volt A.C. installation. Ballast with other voltage, ballast factors, THDs, and special dimming and emergency ballasts are optionally available.

Catalog Number	Lamps Watts	Ballast Type	Nominal Size Ft.	Ship Wt. Lbs. Ea.
500-12-417	4-17W T8	ELB	1x2	18
500-22-417	4-17W T8	ELB	2x2	28
500-22-617	6-17W T8	ELB	2x2	31
500-22-232U6	2-32W T8	ELB	2x2	25
500-14-232	2-32W T8	ELB	1x4	27
500-14-432	4-32W T8	ELB	1x4	32
500-24-432	4-32W T8	ELB	2x4	41
500-24-632	6-32W T8	ELB	2x4	45
500-18-259	2-59W T8	ELB	1x8	46
500-18-459	4-59W T8	ELB	1x8	54

I.B.E.W. - UL LISTED - UNION MADE A.F. of L.