


CLOUDLITE FLUORESCENT LUMINAIRE

SURFACE OR PENDANT MOUNT

SERIES 590

T8 ELECTRONIC

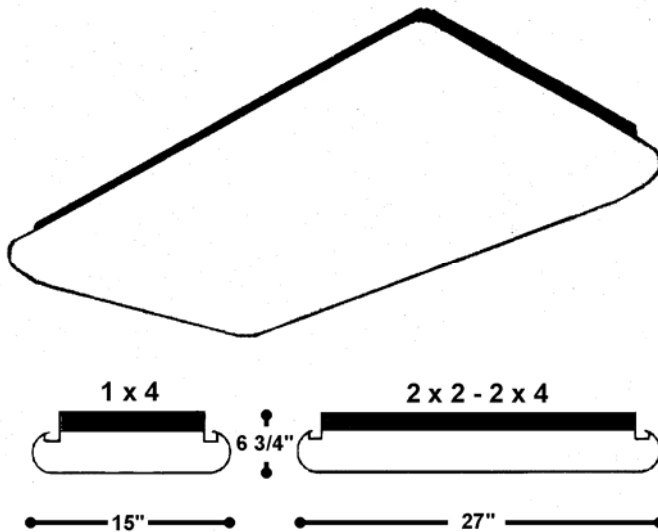

PROJECT:
FIXTURE TYPE:
CATALOG NO.:
VOLTS:
BALLAST TYPE:
DATE:

FEATURES: One piece molded white translucent acrylic diffuser. Housing is finished in white or black enamel for a floating appearance.

SPECIFICATIONS

CONSTRUCTION: Constructed of heavy code gauge steel, die formed for uniformity and accuracy, spot welded one piece construction. The housing design offers a shallow, fully luminous light source.

DIFFUSER: One piece, white dish wraps around housing, swings down from either side for ease of relamping and maintenance. Manufactured from 100% white translucent virgin acrylic.

BALLAST: Standard 32 watt fully electronic T8, or 40 watt twin tube parallel instant start, high power factor, Class "P", minimum .85 Ballast Factor, THD < 20%, for 120V 60 Hz operation. Energy saving Magnetic (ESB) and other ballast are optionally available.

MOUNTING: Fixtures may be suspended or mounted directly on the ceiling. Twin and single stem & canopy kits are available for suspended mounting. Adequate knockouts and holes are provided for mounting and feeds.

FINISH: All steel components parts are corrosion protected and coated with baked synthetic polyester for maximum durability.

CERTIFICATION: U.L. listed and I.B.E.W. Union made.

ORDERING INFORMATION

CATALOG #	LAMPS	BALLAST	SIZE
59014232	2-F32W-T8	ELECTRONIC	1 X 4
59014432	4-F32W-T8	ELECTRONIC	1 X 4
590222U31	2-FB32W-T8	ELECTRONIC	2 X 2
59022340BX	3-PLL40W-T5	ELECTRONIC	2 X 2
59024232	2-F32W-T8	ELECTRONIC	2 X 4
59024332	3-F32W-T8	ELECTRONIC	2 X 4
59024432	4-F32W-T8	ELECTRONIC	2 X 4
59024632	6-F32W-T8	ELECTRONIC	2 X 4

OPTIONAL: Emergency battery backup (add suffix "EML")
 Electronic dimming ballast (add suffix "DIM")
 White housing (add suffix "WHT")
 Black housing (add suffix "BLK")